

PRESIDENT

HARRISON II ASC 12/24 V



- Priority channel memorization • ANL/NB/Hi-Cut filter
- Vox (hands-free function) • Up/Down Mic • Roger Beep
- Scan function • AM/FM • CTCSS/DCS • PA (Public Address)
- Large LCD display • Talkback • Lock function
- Key beep...

powered by a 12 or 24 V battery

*See warranty conditions on our website: www.president-electronics.com

Groupe
PRESIDENT
ELECTRONICS
since 1978


S.A. Capital 10.000.000 €

Siège Social / Head Office – France – Route de Sète – BP 100 – 34540 BALARUC

Site : <http://www.president-electronics.com> – e-mail : groupe@president-electronics.com

2151/12-22 C0448



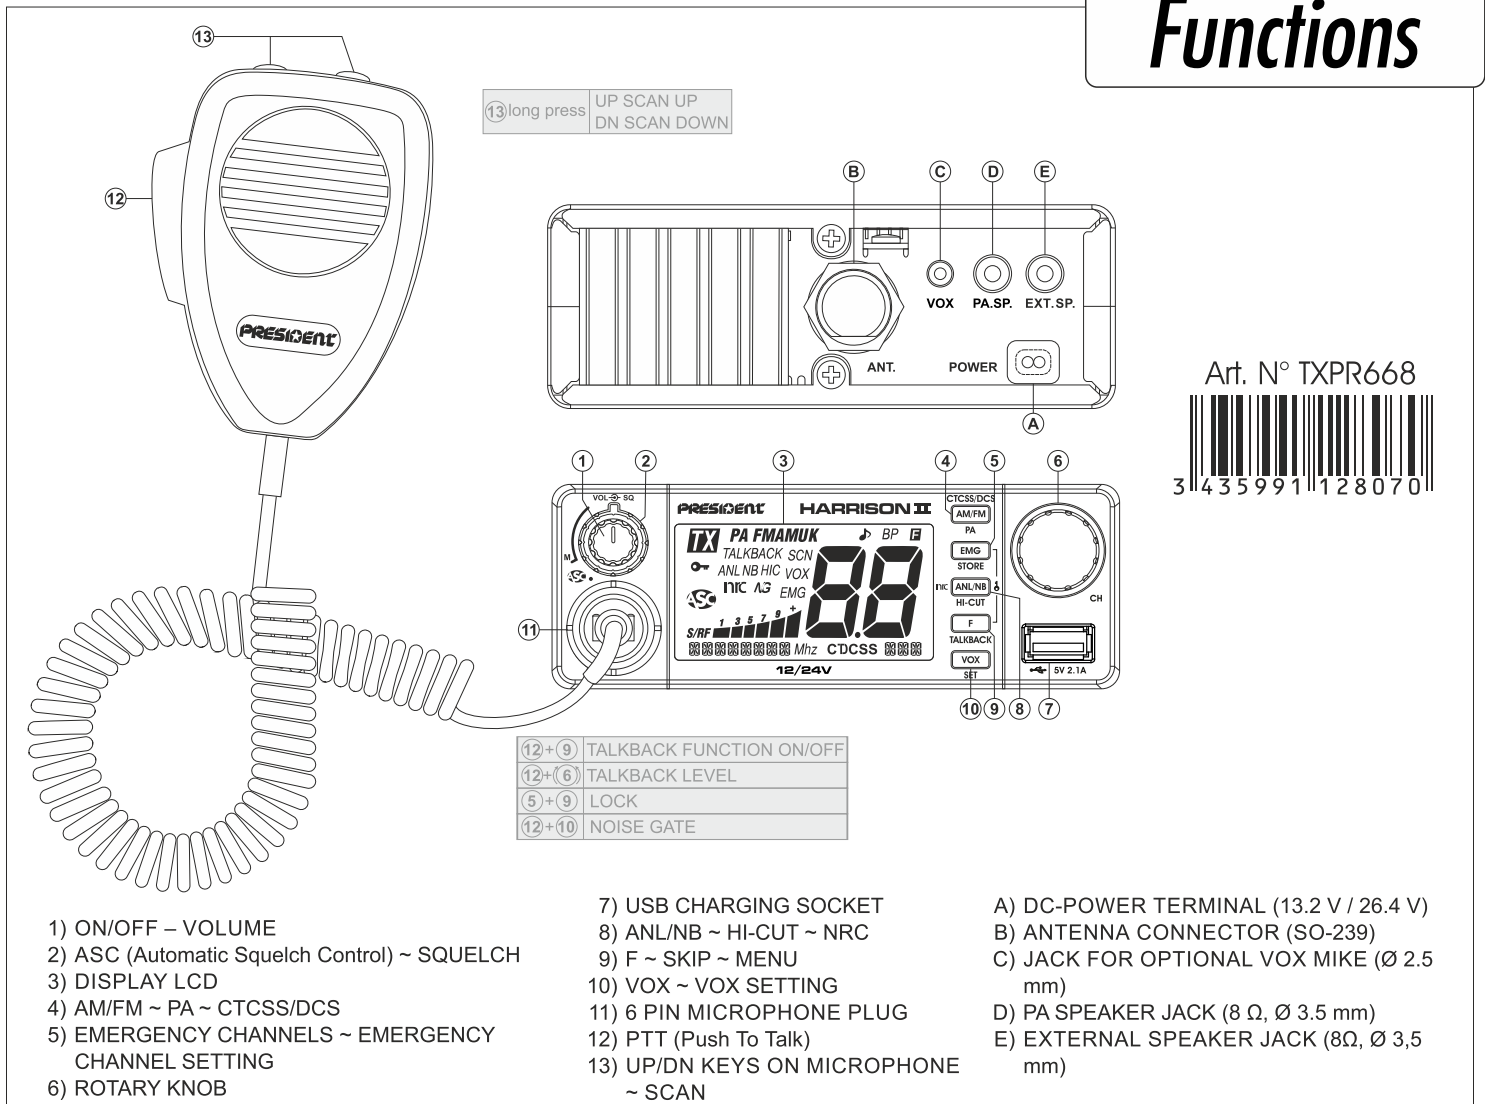

1) GENERAL

- Channels : 40
- Modulation modes : AM/FM
- Frequency ranges : from 26.965 MHz to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V / 26.4 V
- Dimensions (in mm) : 125 (L) x 165 (P) x 45 (H) mm
- Weight : 0.9 kg
- Supplied accessories : 1 microphone electret UP/DOWN with support, mounting cradle, crews and fused power cord.

2) TRANSMISSION

- Frequency allowance : +/- 200 Hz
- Carrier power : 4 WAM / 4 WFM
- Transmission interference : inferior to 4 nW (- 54 dBm)
- Audio response : 300 Hz to 3 KHz in AM/FM
- Emitted power in the adj. channel : inferior to 20 μW
- Microphone sensitivity : 3.0 mV
- Maximum drain : < 2 Amax. with modulation (13.2 V)
< 1 Amax. with modulation (26.4 V)
- Modul. signal distortion : 2%

3) RECEPTION

- Maxi. sensitivity at 20 dB sinad : 0.5 μV - 113 dBm (AM)
0.35 μV - 116 dBm (FM)
- Frequency response : 300 Hz to 3 kHz in AM/FM
- Adjacent chan. selectivity : 60 dB
- Maximum audio power : 3 W
- Squelch sensitivity : min. 0.2 μV - 120 dBm
max. 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Drain : 180 ~ 500 mAmax (13.2 V)
90 ~ 250 mAmax (26.4 V)

Specifications

Powered by a 12 or 24 V battery



all european standards

