

PRESIDENT

TEDDY II



All european standards



2+3* years warranty

PRESIDENT



7 COLOR DISPLAY



- Large LCD display multifunction • 7 color display • AM / FM
- Roger Beep • Programmable Key Beep • Integrated ANL filter
- NB filter • Vox (hands-free function) • TOT (Time Out Timer)
- Talkback • 2 programmable emergency channels • Reset...

Groupe

PRESIDENT
ELECTRONICS

since 1978

Siège Social / Head Office – France – Route de Sète – BP 100
34540 BALARUC

Site Internet : <http://www.president-electronics.com>

e-mail : groupe@president-electronics.com


2105/08-20 - C0435



*See warranty conditions on our website: www.president-electronics.com

TEDDY II

Functions

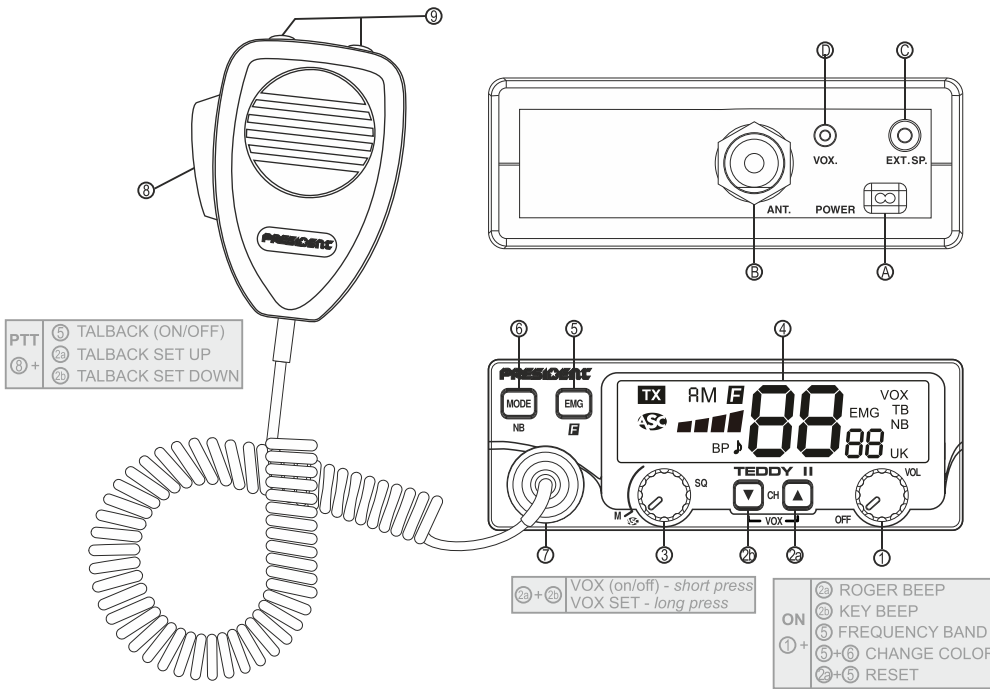

- FUNCTIONS TURNING ON THE UNIT**
- 1) ROGER BEEP (▲ key or UP knob)
 - 2) KEY BEEP (▼ key or DN knob)
 - 3) F - FREQUENCY BAND SELECTION (F key)
 - 4) COLOR (MODE + EMG keys)
 - 5) RESET (▲ + EMG keys)

- FUNCTIONS WITH PTT SWITCH**
- 1) TALKBACK (PTT + F)
 - 2) TALKBACK LEVEL (PTT + ▲ or ▼)

- PTT
 (8) + (5) TALBACK (ON/OFF)
 (8) + (2) TALBACK SET UP
 (8) + (3) TALBACK SET DOWN

- (2) + (2) VOX (on/off) - short press
 (2) + (2) VOX SET - long press

- ON
 (1) + (2) ROGER BEEP
 (2) KEY BEEP
 (5) FREQUENCY BAND
 (8) + (6) CHANGE COLOR
 (2) + (5) RESET

- 1) ON/OFF - VOLUME
- 2) CHANNEL SELECTOR: ▲/▼ keys on unit
- 2a & 2b) VOX ~ VOX SET
- 3) ASC (Automatic Squelch Control)/SQUELCH
- 4) DISPLAY
- 5) EMG ~ EMG STORE ~ F - FREQUENCY BAND SELECTION
- 6) MODE ~ NB
- 7) 6 PIN MICROPHONE PLUG
- 8) PTT (Push To Talk)

- TOT (Time Out Timer)
- 9) CHANNEL SELECTOR: UP/DN knobs on the microphone
- A) DC-POWER TERMINAL (13.2V/26.4V)
 B) ANTENNA CONNECTOR (SO-239)
 C) EXTERNAL SPEAKER JACK (8Ω, Ø 3.5 mm)
 D) OPTIONAL VOX MIKE (Ø 2.5 mm)

Art. N° TXPR276



1) GENERAL

- Channels : 40
- Modulation modes : AM/FM
- Frequency ranges : from 26.965 MHz to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2V
- Dimensions (in mm) : 125 (L) x 151 (D) x 45 (H)
- Weight : ~ 0.9 kg
- Accessories supplied : Electret microphone UP/DOWN with support, mounting cradle, screws.
- Filter : ANL (Automatic Noise Limiter) built-in

2) TRANSMISSION

- Frequency allowance : +/- 200 Hz
- Carrier power : 4 WAM / 4 W FM
- Transmission interference : inferior to 4 nW (- 54 dBm)
- Audio response : 300 Hz to 3 KHz in AM/FM
- Emitted power in the adj. channel : inferior to 20 μW
- Microphone sensitivity : 7 mV
- Maximum drain : 1.7 A at 13.2 V
- Modul. signal distortion : 2 %

Specifications

3) RECEPTION

- Maxi. sensitivity at 20 dB sinad : 0.5 μV - 113 dBm AM
0.35 μV - 116 dBm FM
- Frequency response : 300 Hz to 3 kHz
- Adjacent chan. selectivity : 60 dB
- Maximum audio power : 2.5 W
- Squelch sensitivity : min. 0.2 μV - 120 dBm
max. 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Drain : 160 ~ 420 mA



All european standards

